

# Compression force transducer

## Standard version to 100 kN

### Model F1821

WIKA data sheet FO 51.59



#### Applications

- Equipment manufacturing
- Production lines
- Measuring and control systems
- Automation industry
- Laboratory

#### Special features

- Measuring ranges 0 ... 200 N to 0 ... 100 kN
- Relative linearity error 0.5 %  $F_{nom}$
- Stainless steel version
- Low installation height, easy to install
- Ingress protection IP66



Compression force transducer, model F1821

#### Description

The F1821 compression force transducer is suitable for harsh environmental conditions and available in measuring ranges to 100 kN. Its compactness enables a universal and reliable use in industry and laboratories.

This force transducer is easy to handle and its small dimensions predestine it particularly for use in narrow structures with limited space in which compression forces must be measured.



Data sheet for similar products:

Compression force transducer, Standard version to 300 kN, model F1811, data sheet FO 51.56  
 Compression force transducer, Miniature design to 1,000 N, model F1814, data sheet FO 51.57  
 Compression force transducer, Miniature design to 5 kN, model F1818, data sheet FO 51.58  
 Compression force transducer, Standard version from 1 t, model F1848, data sheet FO 51.76


## Specifications per VDI/VDE/DKD 2638

Model F1821								
Rated force $F_{nom}$ kN	0.2	0.3	0.5	1	1.5	2	3	5
	10	15	20	30	50	60	75	100
Rated force $F_{nom}$ lbf	45	67.44	112	225	337	450	674	1,124
	2,250	3,372	4,500	6,744	11,240	13,500	16,881	22,250
Relative linearity error $d_{lin}$	0.5 % $F_{nom}$							
Relative reversibility error $v$	0.5 % $F_{nom}$							
Relative span in unchanged mounting situation $b_{rg}$	0.1 % $F_{nom}$							
Relative deviation of zero signal $d_{s,0}$	$\pm 3$ % $F_{nom}$							
Temperature effect on the zero signal $TK_0$	0.05 % $F_{nom}/10$ K							
Temperature effect on the characteristic value $TK_C$	0.05 % $F_{nom}/10$ K							
Limit force $F_L$	150 % $F_{nom}$							
Breaking force $F_B$	200 % $F_{nom}$							
Material of the measuring body	Stainless steel							
Rated temperature range $B_{T, nom}$	-10 ... +40 °C [-50 ... +104 °F]							
Service temperature range $B_{T, G}$	-20 ... +80 °C [-68 ... +176 °F]							
Input resistance $R_e$	385 $\pm$ 10 $\Omega$							
Output resistance $R_a$	350 $\pm$ 5 $\Omega$							
Insulation resistance $R_{is}$	$\geq 5,000$ M $\Omega$ /DC 100 V							
Output signal (rated characteristic value) $C_{nom}$	1.5 $\pm$ 0.15 mV/V							
Electrical connection	Cable $\varnothing 4 \times 3,000$ mm [ $\varnothing 0.2$ in $\times$ 118 in]							
Voltage supply	DC 5 ... 10 V (max. 15 V)							
Ingress protection (per IEC/EN 60529)	IP66							
Weight	0.4 kg [0.88 lbs]							

## Approvals

Logo	Description	Country
	EU Declaration of Conformity	European Union
	EMC Directive	
	RoHS Directive	
	EAC (Option)	Eurasian Economic Community
	EMV-Directive	


## Dimensions in mm [in]

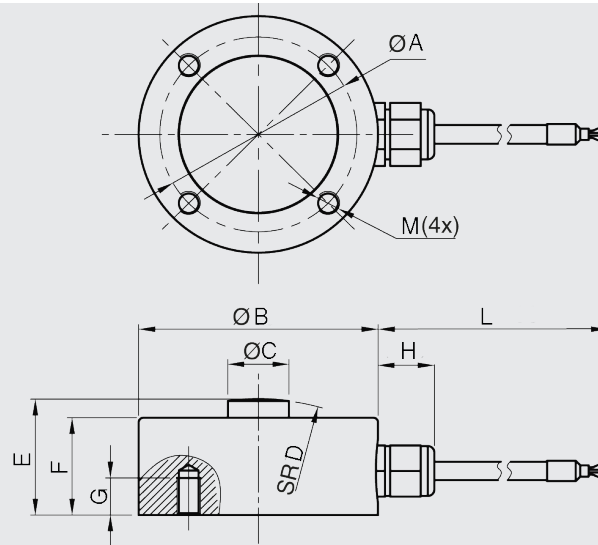

Rated force in kN [lbf]	Dimensions in mm [in]									
	ØA	ØB	ØC	SR D	E	F	G	H	L	M
0.2 [45] / 0.3 [67.44] / 0.5 [112] / 1 [225] / 1.5 [337] / 2 [450] / 3 [674] / 5 [1,124] / 10 [2,250] / 15 [3,372] / 20 [4,500]	42 [1.65]	50 [1.97]	13 [0.51]	50 [1.97]	25 [0.98]	21 [0.83]	8 [0.32]	12.5 [0.49]	3,000 [118]	M5
30 [6,744] / 50 [11,240]	42 [1.65]	50 [1.97]	16 [0.63]	50 [1.97]	25 [0.98]	21 [0.83]	8 [0.32]	12.5 [0.49]	3,000 [118]	M5
60 [13,500] / 75 [16,861] / 100 [22,500]	42 [1.65]	50 [1.97]	21 [0.83]	50 [1.97]	25 [0.98]	21 [0.83]	8 [0.32]	12.5 [0.49]	3,000 [118]	M5

## Pin assignment

Electrical connection	
Excitation voltage (+)	Red
Excitation voltage (-)	Black
Signal (+)	Green
Signal (-)	White
Shield ⊕	Shield

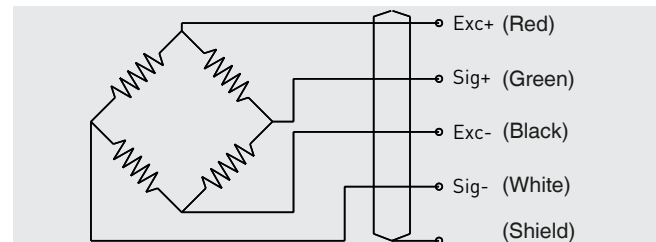

© 08/2019 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.

