

Magnetostrictive level transmitter

High-resolution measurement principle, compact design

Model FLM-CA

WIKA data sheet LM 20.04



for further approvals
see page 2



Applications

- High-accuracy level detection for liquid media

Special features

- Compact and space-saving design
- Output signal 4 ... 20 mA (NAMUR NE43) or HART® ver. 6
- Operating limits:
 - Operating temperature: $T = -40 \dots +250 \text{ °C}$
 - Operating pressure: $P = \text{Vacuum to } 40 \text{ bar}$
 - Limit density: $\rho \geq 580 \text{ kg/m}^3$
- Explosion-protected version (option)
- Vibration resistant version (option)

Description

The model FLM-CA magnetostrictive level transmitter is used for the high-accuracy, continuous level detection of liquids and is based on determining the position of a magnetic float according to the magnetostrictive measurement principle.

The FLM-CA emits a 4 ... 20 mA output signal, which is configured via buttons within the probe head. Optionally, the FLM-CA is also available with HART® protocol as a digital output signal. Probe lengths of 100 mm to 3 m and also various temperature and pressure ranges are possible.

In comparison to the FLM-S, the FLM-CA is particularly notable for its very compact and space-saving design. In addition, it can be used in applications with vibrations up to 4 g.





Fig. left: Mounting thread, cylinder float from stainless steel

Fig. right: Mounting flange, sphere float from stainless steel

Model overview

| Model | Description |
|---------|-----------------------------|
| FLM-CA | Standard version |
| FLM-CAI | Explosion-protected version |

Approvals

| Logo | Description | Country |
|---|---|----------------|
|  | EU declaration of conformity <ul style="list-style-type: none"> EMC directive EN 61326 emission (group 1, class B) and immunity (industrial application) RoHS directive | European Union |
|  | ATEX directive (option - only with model FLM-CAI) Hazardous areas - Ex i II 1G Ex ia IIC T4 Ga II 1/2G Ex ia IIC T4 ... T3 Ga/Gb II 2G Ex ia IIC T4 ... T3 Gb II 1D Ex ia IIIC T140 °C Da No. TÜV 18 ATEX 225120 X | |

Approvals and certificates, see website

Specifications

| Magnetostrictive level transmitter, model FLM-CA | |
|--|--|
| Guide tube | <ul style="list-style-type: none"> Ø 6 mm (max. 1,000 mm) Ø 12 mm (max. 3,000 mm) |
| Process connection | Mounting thread downwards <ul style="list-style-type: none"> G 1/2" ... G 2" NPT 1/2" ... NPT 2" Mounting flange <ul style="list-style-type: none"> ANSI 1/2" ... 2 1/2", class 150 ... 600 EN DN 20 ... DN 65, PN 6 ... PN 100 DIN DN 20 ... DN 65, PN 6 ... PN 100 Other process connections on request |
| Materials | |
| Wetted parts | Stainless steel 1.4571 (316Ti) |
| Connection head | Stainless steel 1.4305 (303) |
| Insertion length | |
| Guide tube Ø 6 mm | 100 ... 1,000 mm |
| Guide tube Ø 12 mm | 100 ... 3,000 mm |
| Measurement accuracy | ±1.25 mm |
| Resolution | 0.1 mm |
| Electrical connection | Connection terminals max. 1.5 mm ² |
| Supply voltage | DC 8 ... 30 V |
| Output signal | <ul style="list-style-type: none"> 4 ... 20 mA (NAMUR NE43) HART® ver. 6 |


| Magnetostrictive level transmitter, model FLM-CA | |
|---|--|
| Vibration resistant version (option) | to 4 g (only for guide tube Ø 12 mm) |
| Operating pressure | Depending on the float, max. 40 bar |
| Operating temperature | |
| Guide tube Ø 6 mm | -40 ... +125 °C |
| Guide tube Ø 12 mm | -40 ... +250 °C |
| Ambient temperature | -40 ... +85 °C |
| Ingress protection per EN 60529 | IP68 |
| Configuration | |
| Version without HART® protocol | Via two built-in buttons in the connection housings |
| Version with HART® protocol | Via two built-in buttons, HART® communicator or HART® interface in the connection housings |

Float

| Material | Version | Description | Suits guide tube Ø in mm | Minimum dimension U in mm | Max. operating pressure in bar | Limit density 85 % in kg/m³ |
|---------------------------------------|----------------|--------------------|---------------------------------|----------------------------------|---------------------------------------|---|
| Stainless steel 1.4571 (316Ti) | V18/42A | Cylinder Ø 18 mm | 6 | 48 | 6 | 800 |
| | V27A | Cylinder Ø 27 mm | 6 | 22 | 16 | 700 |
| | V29A | Sphere Ø 29 mm | 6 | 20 | 25 | 920 |
| | V29A/40 | Cylinder Ø 29 mm | 12 | 26 | 10 | 620 |
| | V44A | Cylinder Ø 44 mm | 12 | 32 | 16 | 720 |
| | V52A | Sphere Ø 52 mm | 12 | 32 | 40 | 690 |
| Titanium 3.7035 (Grade 2) | T29A | Sphere Ø 29 mm | 6 | 21 | 30 | 700 |
| Buna (NBR) | B20A | Cylinder Ø 20 mm | 6 | 26 | 3 | 940 |
| | B25A | Cylinder Ø 25 mm | 6 | 20 | 3 | 790 |
| | B30A | Cylinder Ø 30 mm | 6 | 51 | 3 | 680 |
| | B40A | Cylinder Ø 40 mm | 12 | 36 | 3 | 580 |


Dimensions in mm

■ Read-out unit

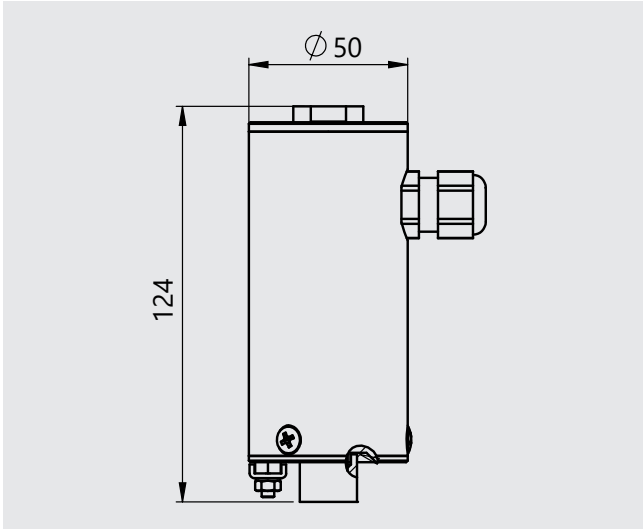


■ Sensor unit

Mounting thread

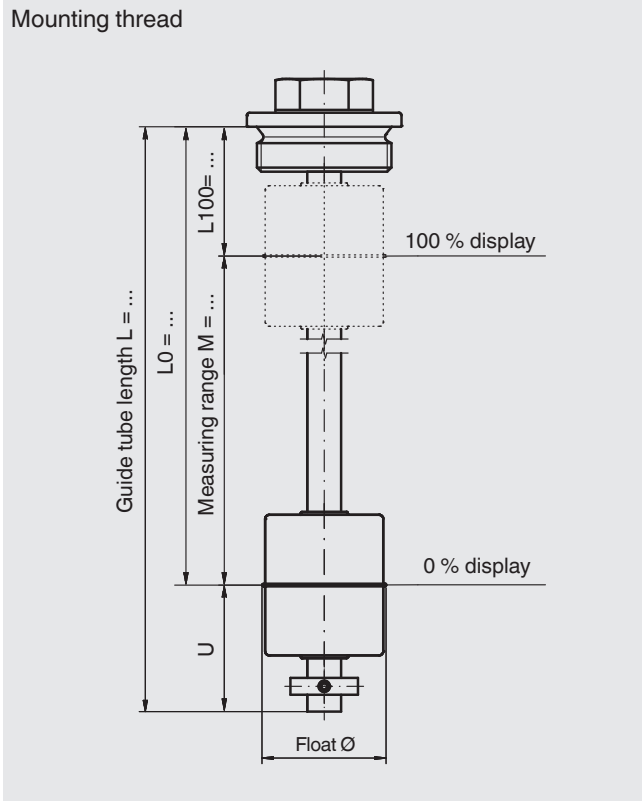

Mounting flange

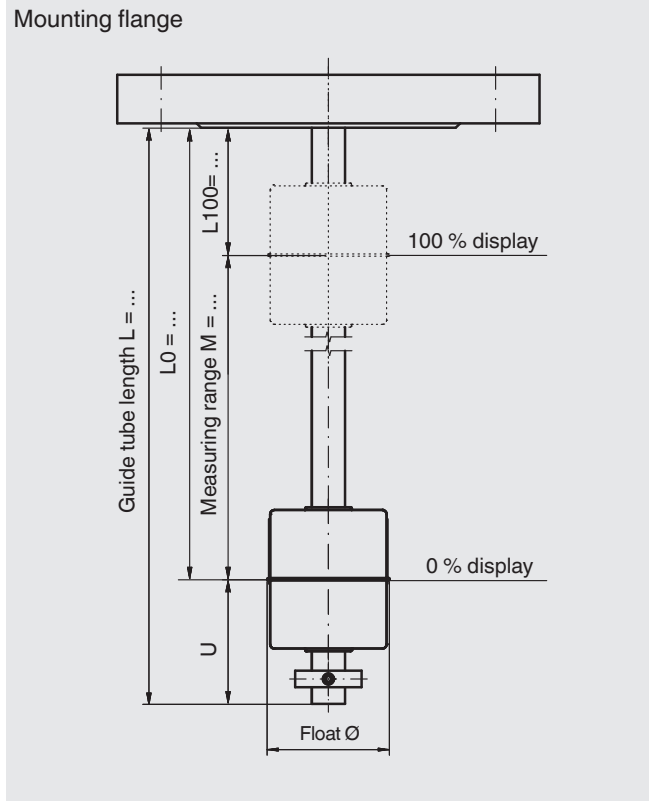

Ordering information

Model / Version / Electrical connection / Process connection / Guide tube diameter / Guide tube length (insertion length) L / 100 % mark L1 / Measuring range M (span 0 ... 100 %) / Process specifications (operating temperature and pressure, limit density) / Options

© 09/2019 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.



WIKA Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg/Germany
Tel. +49 9372 132-0
Fax +49 9372 132-406
info@wika.de
www.wika.de